


Solid Aluminum Conductive Polymer Radial Capacitors

Sample Kit Contents

KEMET Part Number	VDC	VDC Surge Voltage	Rated Capacitance 120 Hz 20°C (µF)	Case Size D x L (mm)	ESR 100 kHz 20°C (mΩ)	RC 100 kHz 105°C (mA)	LC 20°C 2 Minutes (µA)	Quantity
105°C/2,000 Hours, High Ripple Current								
A750EK477M0JAAE018	6.3	7.2	470	6.3 x 8	18	3100	592	5
A750KK477M1AAAE016	10	11.5	470	8 x 8	16	4100	940	5
A750EK107M1CAAE018	16	18.4	100	6.3 x 8	18	2900	320	5
A750KS477M1CAAE013	16	18.4	470	8 x 12	13	4100	1504	5
A750KK107M1EAAE040	25	28.8	100	8 x 8	40	4500	500	5
105°C/5,000 Hours, Long Life								
A755MS158M0EAAE013	2.5	2.9	1500	10 x 12	13	5250	563	5
A755KS128M0GAAE014	4	4.6	1200	8 x 12	14	4900	720	5
A755KS108M0JAAE013	6.3	7.2	1000	8 x 12	13	4500	945	5
A755MS158M1AAAE013	10	11.5	1500	10 x 12	13	5100	2250	5
A755MS277M1EAAE015	25	28.8	270	10 x 12	15	4850	1013	5
125°C/2,000 Hours, High Voltage, High Ripple Current								
A759KS107M1VAAE031	35	40.3	100	8 x 12	31	4290	525	5
A759KS396M1HAAE042	50	57.5	39	8 x 12	42	1630	293	5
A759MS107M1HAAE031	50	57.5	100	10 x 12	31	2830	750	5
A759KS476M1JAAE068	63	72.5	47	8 x 12	68	1630	444	5
A759PY337M1JAAE042	63	72.5	330	13 x 20	42	4030	3119	5
A759MS226M2AAAE045	100	115	22	10 x 12	45	2300	330	5
A759MS186M2CAAE090	160	184	18	10 x 12	90	1944	432	5
A759MS685M2EAAE482	250	287.5	6.8	10 x 12	482	780	255	5
A759MS825M2EAAE458	250	287.5	8.2	10 x 12	458	950	308	5

Dimensions – Millimeters

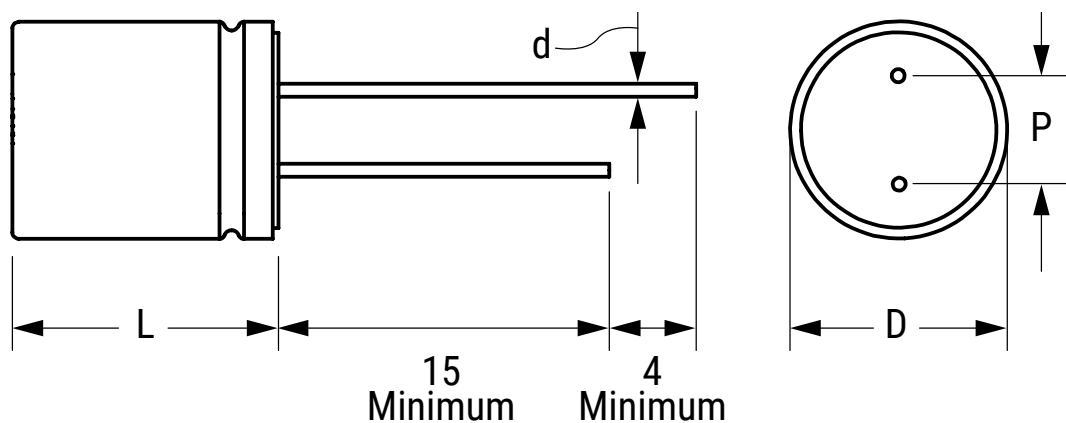

Size Code	D		L		d		P	
	Nominal	Tolerance	Nominal	Tolerance	Nominal	Tolerance	Nominal	Tolerance
EK	6.3	±0.5	8	±1.0	0.5	±0.5	2.5	±0.5
KK	8	±0.5	8	±1.0	0.6	±0.5	3.5	±0.5
KS	8	±0.5	12	±1.0	0.6	±0.5	3.5	±0.5
MS	10	±0.5	12	±1.0	0.6	±0.5	5.0	±0.5
PY	13	±0.5	20	±2.0	0.6	±0.5	5.0	±0.5

KEMET Electronics Corporation Sales Offices

For a complete list of our global sales offices, please visit www.kemet.com/sales.

Disclaimer

YAGEO Corporation and its affiliates do not recommend the use of commercial or automotive grade products for high reliability applications or manned space flight.

All product specifications, statements, information and data (collectively, the "Information") in this datasheet are subject to change. The customer is responsible for checking and verifying the extent to which the Information contained in this publication is applicable to an order at the time the order is placed. All Information given herein is believed to be accurate and reliable, but it is presented without guarantee, warranty, or responsibility of any kind, expressed or implied.

Statements of suitability for certain applications are based on KEMET Electronics Corporation's ("KEMET") knowledge of typical operating conditions for such applications, but are not intended to constitute – and KEMET specifically disclaims – any warranty concerning suitability for a specific customer application or use. The Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by KEMET with reference to the use of KEMET's products is given gratis, and KEMET assumes no obligation or liability for the advice given or results obtained.

Although KEMET designs and manufactures its products to the most stringent quality and safety standards, given the current state of the art, isolated component failures may still occur. Accordingly, customer applications which require a high degree of reliability or safety should employ suitable designs or other safeguards (such as installation of protective circuitry or redundancies) in order to ensure that the failure of an electrical component does not result in a risk of personal injury or property damage.

Although all product-related warnings, cautions and notes must be observed, the customer should not assume that all safety measures are indicated or that other measures may not be required.

KEMET requires its products to be packaged and shipped on pallets. This is because KEMET's products are specifically designed to be packed onto pallets during shipment. If for any reason, the products are removed from pallets by the shipping party and shipped to the end customer, then additional external protection is required. In this instance, an external box with two carton layers and an upwards orientation sticker must be used by the shipping party, with the empty space filled with filling material, and afterwards sealing the box. If this packing and packaging guideline is not followed by the shipping party, the shipping party, and not KEMET, will be held responsible for any packaging, packing and/or product damages upon delivery of the products to the end customer. KEMET hereby disclaims any liability for damages to the products or otherwise that have been, or threaten to be, inflicted, result from or are in any way related to the packaging, packing or damage by the shipping party in contravention of the packing and packaging guidelines herein.

KEMET is a registered trademark of KEMET Electronics Corporation.